



# MAXI**CHARGER**™ **ACELITE BUSINESS** LEVEL 2 ELECTRIC VEHICLE CHARGER SPECIFICATIONS

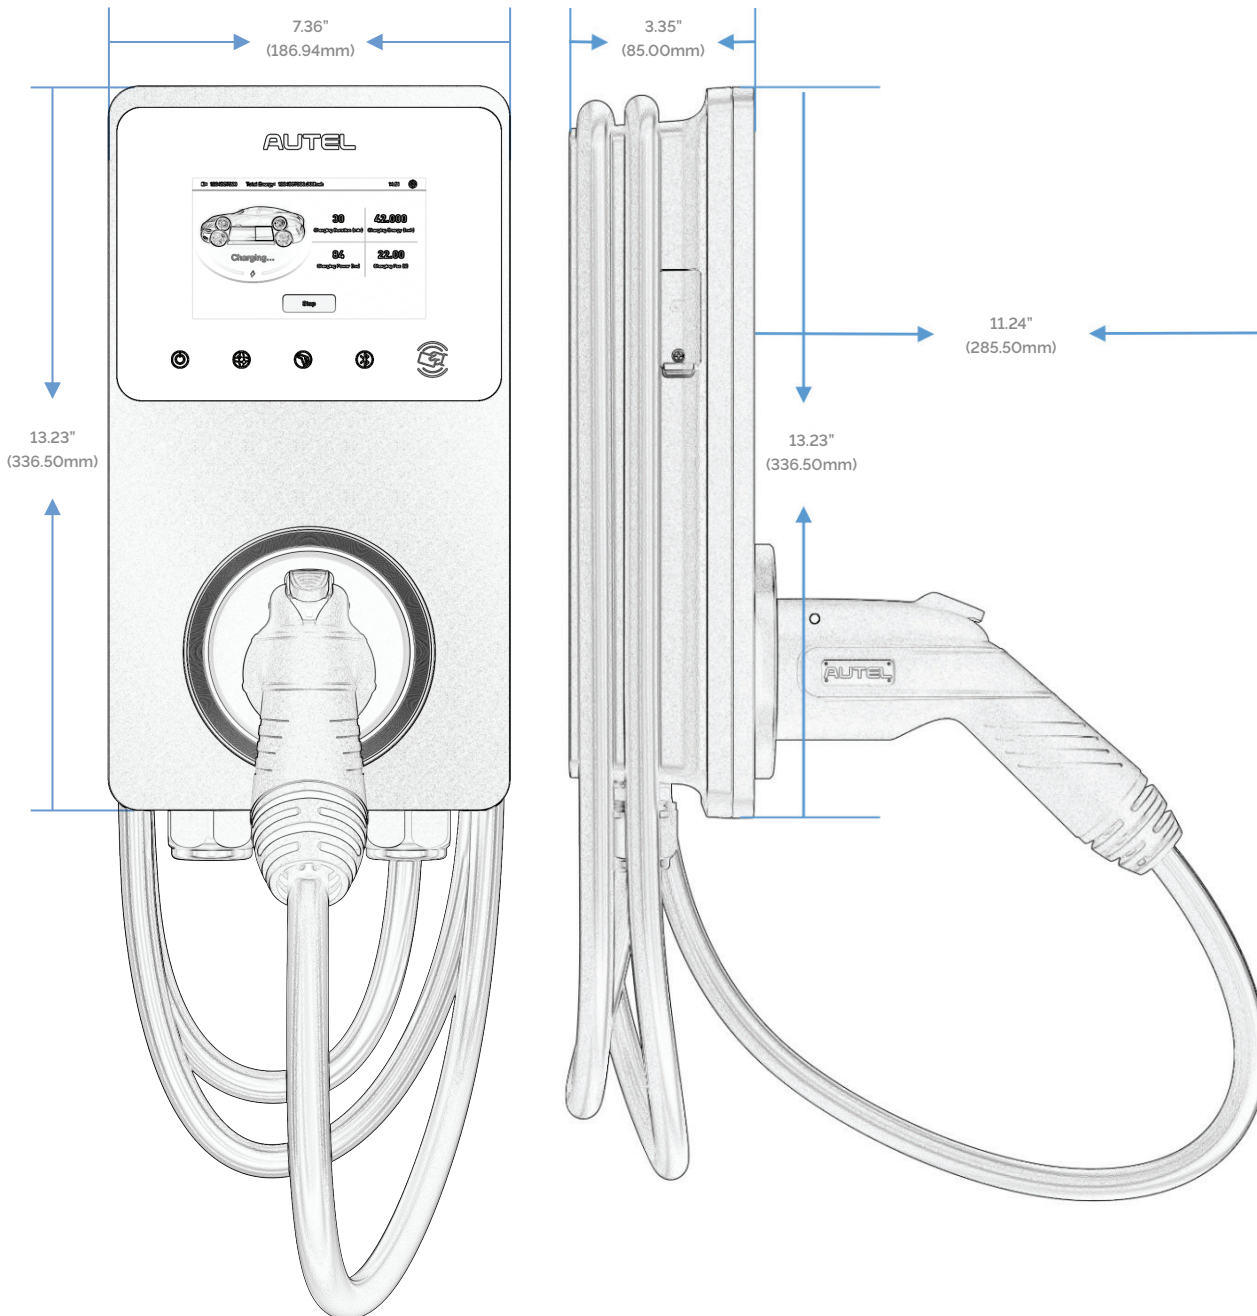

**AUTEL® MAXICHARGER™**  
**ACELITE BUSINESS**  
 LEVEL 2 ELECTRIC VEHICLE CHARGER



## SPECIFICATIONS

### POWER

INPUT/OUTPUT POWER RATING & CURRENT	12kW (240V AC*50A)
INPUT/OUTPUT VOLTAGE	208V±15%; 240V±15%, 60Hz
NETWORK TYPE	L1/N+PE, L1/L2/PE
INPUT CORD	Hardwired
CONNECTOR TYPE	SAE J1772, 25ft (7.5m)
GROUND FAULT DETECTION	20mA CCID
PROTECTION	Overcurrent, Overvoltage, Undervoltage, Integrated Surge Protection
POWER MEASUREMENT ACCURACY	Full Scale

### OPERATIONAL RATINGS

ENCLOSURE RATING	NEMA 4
OPERATING TEMPERATURE RANGE	-40°F ~+131°F (-40°C ~+55°C)
STORAGE TEMPERATURE RANGE	-40°F ~+185°F (-40°C ~+85 °C)
MOUNTING	Wall Or Floor Using A Pedestal
DIMENSIONS (H×W×D)	13.23"x7.36"x3.35" (336×187×85mm)

### USER INTERFACE

STATUS INDICATION	LED/APP/Touch Screen (5 Inch LCD, 800*480)
USER INTERFACE	Autel Charge APP; Autel Charge Cloud
CONNECTIVITY	Bluetooth, Wi-Fi, Ethernet, 4G, CAN, RS485
COMMUNICATION PROTOCOLS	OCPP 1.6J (Can Be Upgraded To OCPP 2.0.1 Later)
USER AUTHENTICATION	APP, RFID Card
CARD READER	ISO 15693, ISO 14443, NFC
SOFTWARE UPDATE	OTA

### CERTIFICATION & STANDARDS

SAFETY & COMPLIANCE	UL 2231-1, UL 2231-2, UL2594, NEC Article 625, CSA C22.2
EMC COMPLIANCE	FCC 15 Class B
CERTIFICATION	Energy Star, OpenADR 2.0b
WARRANTY	36 Months, Warranty Extension Available

DESCRIPTION	PART NO.	MODEL NO.	POWER SUPPLY
MAXICHARGER AC ELITE BUSINESS C50	MCC50AHI	MAXI US AC W12-L-4G	HARDWIRED

